

WEDA 60, 50Hz

Electric submersible pump

Specifications

Portable electric submersible pump for dewatering of construction sites, mines, flooded areas etc. Designed for handling liquid with abrasive particles. Prot class IP68

Pump Types

WEDA 60N Medium head
WEDA 60H High head

Electric Motor

3-phase: Squirrel cage induction motor with built-in contactor.
Insulation: Class F (+155C), IEC 85

Data		WEDA60N	WEDA60H
Rated Output	kW	7.5	7.5
Rated Current A	230v	31	31
	400v	16	16
	500v	13	13
Shaft speed	rpm	2900	2900

Other voltage upon request

Motor Protection

Thermal switch in each winding (+135 degree C)

Cable

Oil and wear resistant rubber cable type HO7RN-F
230v, 20m 4x4mm²
400v, 20m 4x2.5mm²

Shaft Seal

Primary seal: Silicon carbide against silicon carbide.
Secondary seal: Carbon against ceramic
Available in a complete seal pack or as separate items.

Bearings

Single-row ball bearing with C3 clearance

Materials


Castings: Aluminium
Outer-casing: Aluminium
Shaft: Stainless steel
Fasteners: Stainless steel
Impeller: Cr-alloyed white cast iron, 55Rc
Wear parts: Natural rubber

Discharge connection

4" std for WEDA60N, 3" std for WEDA60H, for hose, BSP or NPT

Accessories


Float switch
Zinc anodes
NVB automatic level control
Epoxy coating

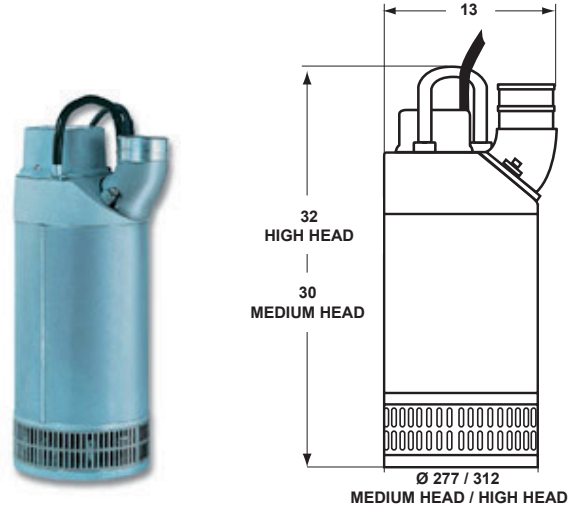

Weight WEDA 60N 55 kg Dimensions (mm).
WEDA 60H 63 kg


Power (kW)

According to ISO 9906 - ANNEX A

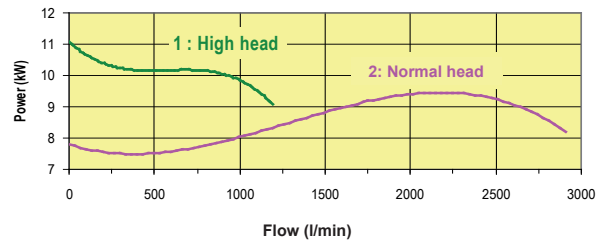

Flow Chart

According to ISO 9906 - ANNEX A

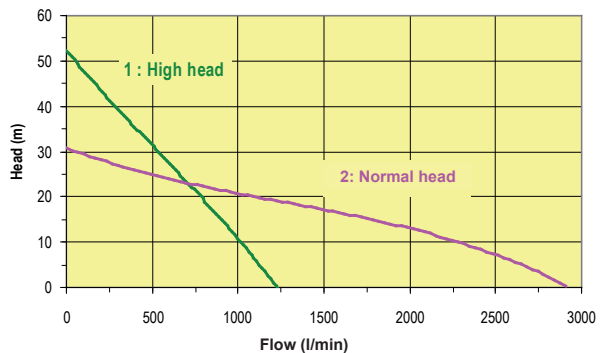

Features

- Robust design
- Lightweight and user friendly
- Wear resistant wet end in CR-alloy steel and natural rubber
- Adjustable wear parts
- Complete seal pack for easy and fast service
- Built-in contactor for DOL start
- Easy installation

Designed for:

- Heavy duty pumping of abrasive liquids
- Max submersible depth of 20m
- Max temperature of liquid +40C
- Max density of liquid, 1.100kg/m³
- pH of the liquid between 5-8
- For special applications contact Weda pump

DYNAPAC

Part of the Atlas Copco Group

www.dynapac.com